

- ◆ Minimum Loss, 4 hybrid design
- ◆ High Isolation, Low VSWR
- ◆ Multi-Band Range
- ◆ 200 Watt per Input Continuous Average Power up to 2.1 GHz[†]
- ◆ High Reliability, RoHS compliant
- ◆ Guaranteed PIM performance
- ◆ Portable package




Model Number	Conn. Type	Frequency Range, MHz	Isolation dB	Coupling dB	VSWR Max
CM-14D	7/16 DIN	350 - 1,500	>25 dB	6.3 ± 1.0	1.30:1
CM-14E	4.3-10	1,500 - 2,500	>20 dB	6.5 ± 1.0	1.35:1
CM-14N	N	2,500 - 2,700	>18 dB	6.6 ± 1.1	1.70:1
		2,700 - 4,900	>15 dB	7.0 ± 1.3	2.00:1
		4,900 - 5,925	>15 dB	7.2 ± 1.5	1.40:1

These Combiner Boxes have been designed to meet the special needs of the wireless market. The CM-14 series now covers the extended bandwidth of 350 - 5,925 MHz, previously offered as a CM-13 series.

They are most commonly used to combine up to four wireless carriers in the operating band to single or multiple antenna feeds or distribution cables. In situations where four similar feeds can be utilized, as required in many in-building applications, all four outputs may be used, eliminating the need for terminating unused ports and the 6 dB hybrid loss.

Port return loss and isolation has been optimized while passive intermodulation (PIM) is minimized. Input and output connectors have been separately grouped for convenient connection and each connector is spaced to allow controlled wrench tightening of connectors.

Outline

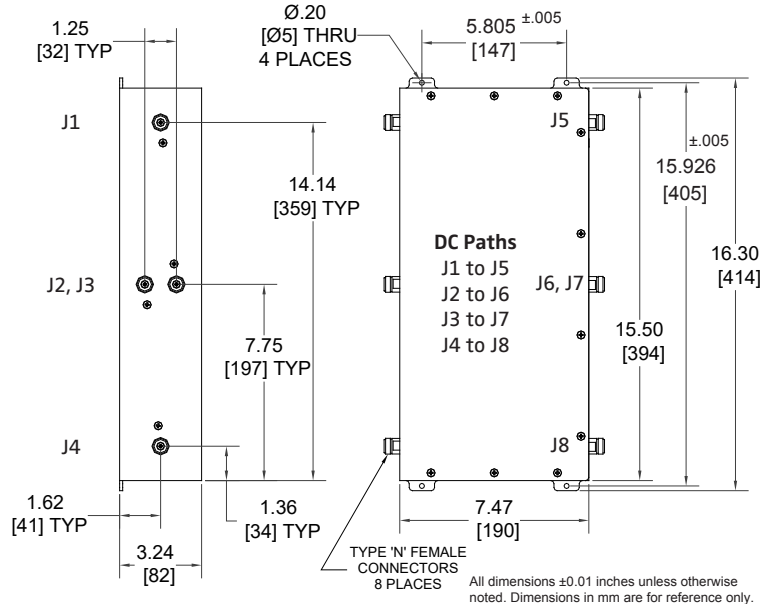

Power per input: 200W up to 2.1 GHz[†],
3.0 kW pk

Impedance: 50Ω nominal

Environment: -15°C to +65°C, Indoor

PIM (Intermod): <-160 dBc (-117 dBm)
(+43dBm x2)

Finish: Housing: Passivated aluminum

Connectors: triplate, (f-f)

Weight: 14 lbs (6.4 kg) nom.

[†] De-rated by 13.3 W per 1 GHz from 2.1 to 5.85 GHz
(max 150 Watts/input at 5.85 GHz)

Note: Specifications are subject to change without prior notification.

06FEB2018

Product code: 3006874

Maahantuojat / Imported by

www.orbis.fi / www.orbis.eu / www.orbis.com.ru

Microlab, A Wireless Telecom Group Company, 25 Eastmans Road, Parsippany, NJ 07054

Tel: (973) 386-9696 • sales@microlabtech.com • www.microlabtech.com • Fax: (973) 386-9191