

Terminal Load

698-2700 MHz

- Low PIM
- High reliability
- Suitable for indoor and outdoor applications
- Wall or pole mounting

Technical Data

Electrical Specifications


Product No.	XMTL0727QM02561H	XMTL0727QM05061H	XMTL0727QM10061H	XMTL0727QM20061H
Input Power (W)	25	50	100	200
Frequency Range (MHz)	698-2700			
Return Loss (dB)	≥19			
PIM3 (@2x43 dBm Carrier) (dBc)	≤-155			
Impedance (Ω)	50			

Mechanical Specifications


Dimensions, HxWxD (excluding connectors and mounting bracke) (mm)	176x176x36	176x176x68	176x176x98	250x176x98
Weight (including connectors and mounting bracket) (kg)	2.5	4.0	4.5	7.2
Connector Type	4.3-10- Male			
Color	Light Gray			
Mounting	Wall Mounted			

Environmental Specifications


Operational Temperature (°C)	-40 to +65
Operational Humidity (%)	≤95
Ingress Protection Class	IP65(Indoor and Outdoor)

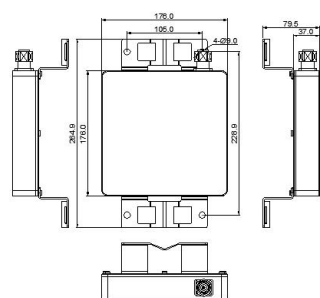


XMTL0727QM02561H

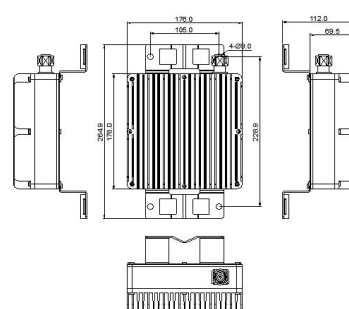

XMTL0727QM05061H

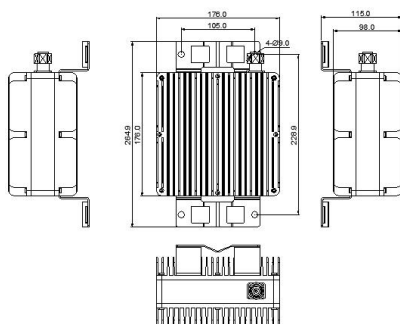

XMTL0727QM10061H

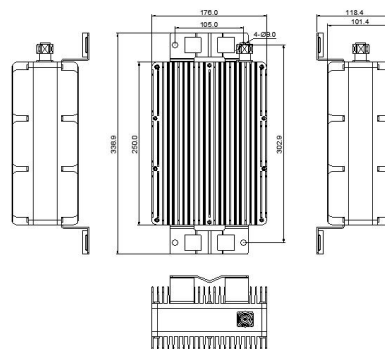

XMTL0727QM20061H