


Plug-in Fixed Attenuator

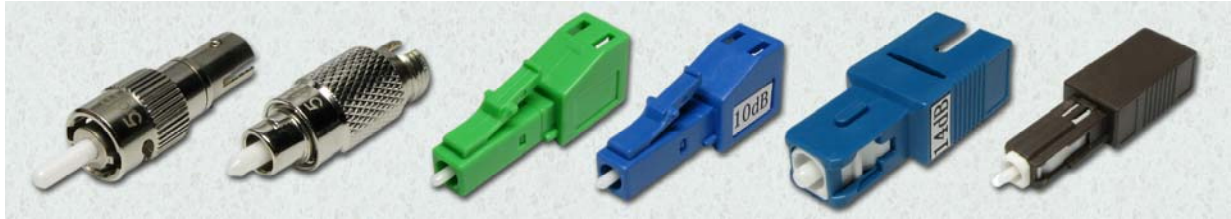

APPLICATIONS

- Telecommunication Networks
- Data Networks
- Video & CATV

FEATURES

- Bellcore Compliant
- Durability (well over 100mw)
- Wavelength Independent (DWDM)
- Simple and Reliable Structure

SPECIFICATIONS

Operating Wavelength:	SM: 1200-1600nm or 1310nm, 1550nm
	MM: 850nm, 1300nm
Return Loss:	≥50 dB (SPC)
	≥55 dB (UPC)
	≥65 dB (APC)
Attenuation Accuracy:	+/-0.5 (1-5) dB
	+/-10% (6-30) dB
Polarization Dependent Loss:	≤0.2dB
Maximum Optical Input Power:	200mW
Operating Temp. Range:	-40 ~ 80° C

ORDERING OPTIONS

Connector Type	Application	Wavelength	Attenuation Level
SC	UPC	1310nm	1, 2, 3, ...25dB
FC	APC	1550nm	
ST		1310/1550nm	
LC			
MU			

Dimension

