


## TECHNICAL SPECIFICATION

7/16M-7/16F 01S

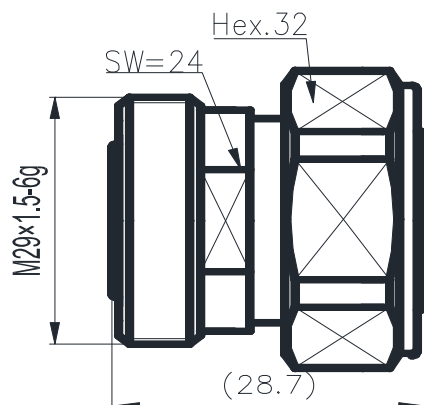

7/16 Type male to 7/16 Type  
female adapter

ID:2.4.81.2122.109

Rev: A0

### Material and Plating

Center contact	Tin Bronze / Silver Plated
Outer contact & Body	Brass / Silver Plated
Dielectric	PTFE
Gasket	Silicon Rubber
Nut	Brass / Nickel Plated

### Electrical Specifications

Characteristics Impedance	50 Ohm
Frequency Range	DC~7.5GHz
Insulation Resistance	≥10000MΩ
Dielectric Withstanding Voltage	4000V rms
Operating Voltage	2500V rms
Center contact resistance	≤0.40mΩ
Outer contact resistance	≤0.20mΩ
Insertion Loss	@DC-3.0 GHz ≤0.17dB
VSWR	@0.8-1.0 GHz ≤1.10
	@1.0-3.0 GHz ≤1.13
PIM3	≤-160dBc

### Environmental & Mechanical Specifications

Durability (matings)	≥500 cycles
Mechanical Shock Test Method	MIL-STD-202, Method 213, Test Condition D
Vibration Test Method	MIL-STD-202, Meth. 204, Cond. A
Temperature Range	-65°C to +165°C
RoHS	Compliant

### Regulatory Compliance / Certification

ISO 9001:2015	Compliant
---------------	-----------

*The facts and figures contained herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.*

**Maahantuojaja / Imported by: Orbis Oy, [www.orbis.fi](http://www.orbis.fi)**  
**Tuotekoodi / Product code: 3003548**