


TECHNICAL SPECIFICATION

7/16M-NF B

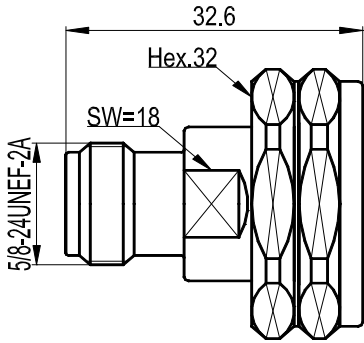

7.16 Type male to N Type female  
ID:2.4.81.1221.5  
Rev: A0

Material and Plating

Center contact	Tin Bronze / Silver Plated
Outer contact & Body	Brass / Trimetal Plated
Dielectric	PTFE
Gasket	Silicon Rubber
Nut	Brass / Nickel Plated

Electrical Specifications

Characteristics Impedance	50 Ohm	
Frequency Range	DC~7.5GHz	
Insulation Resistance	≥10000MΩ	
Dielectric Withstanding Voltage	2500V rms	
Operating Voltage	1400V rms	
	N type	7/16 type
Center contact resistance	≤1.00mΩ	≤0.4mΩ
Outer contact resistance	≤0.25mΩ	≤0.2mΩ
Insertion Loss	@DC-3.0 GHz	≤0.17dB
VSWR	@0.8-1.0 GHz	≤1.08
	@1.0-3.0 GHz	≤1.10
PIM3		≤-155dBc

Environmental & Mechanical Specifications

Durability (matings)	≥500 cycles
Mechanical Shock Test Method	MIL-STD-202, Method 213, Test Condition D
Vibration Test Method	MIL-STD-202, Meth. 204, Cond. A
Temperature Range	-65°C to +165°C
RoHS	Compliant

Regulatory Compliance / Certification

ISO 9001:2015	Compliant
---------------	-----------

The facts and figures contained herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.

Maahantuojaja / Imported by: Orbis Oy, [www.orbis.fi](http://www.orbis.fi)  
Tuotekoodi / Product code: 3003550