


TECHNICAL SPECIFICATION

DP-160-4310F

DP-160-4310F

Diplexer , 80~520 MHz&698-2700 MHz, PIM -160 dBc with 4.3-10 connectors.

Outline(approx.):

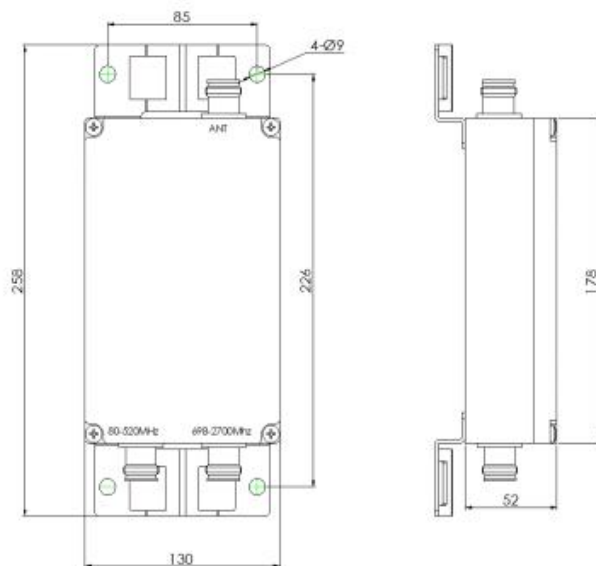

Electrical	
Frequency Range	80~520 MHz&698-2700 MHz
Insertion Loss	≤ 1.0 dB
Isolation	≥35dB
Return Loss	≤-18 dB
Power Rating	Average Power≥200W, Peak Power≤ 1000W
PIM 3	≤-160dBc@2x43dBm inputs
Impedance	50Ω
Mechanical	
Weight	2.5 kg (approx. Single unit)
Connector	4.3-10 female