


Terminal load

698-2700Mhz

Terminal Load

Low PIM and high return loss
Cover 698-2700Mhz

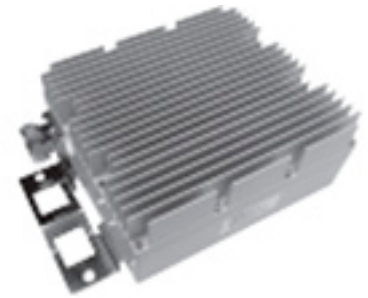

Electrical Specifications

Model Name	XMTL0727QM02561X
Frequency Range (MHz)	698-2700
Return Loss (dB)	≥ 19
PIM3 (@2x43 dBm) (dBc)	≤ 160
Input Power (W)	25
Impedance (Ω)	50

Mechanical Specifications

Dimensions HxWxD (excluding connectors and mounting bracket) (mm)	176 x 176 x 38.5
Weight (incl. connectors and mounting bracket) (kg)	2.5
Connector Type	4.3-10 Male
Color	Light Gray
Mounting	Pole (clamps included for $\Phi 35$ -125mm pole) or Wall Mounted
Operational Temperature ($^{\circ}\text{C}$)	-40 to +65
Operational Humidity (%)	≤ 95
Ingress Protection Class	IP65 (Indoor and Outdoor)

Outline Drawing

