

Indoor Wide band Omni Antenna coverage 380MHz - 6000MHz




Electrical Specifications

Item No.	AI380-6000V05i360A-4310F			
Frequency Range	MHz	380-520	698-960	1710-6000
Gain	dBi	2.0±1.0	2.5±1.0	4.0±1.0
Polarization		Vertical		
Beam width	Horizontal	deg	360	
	Vertical		90	35
VSWR		≤3.0	≤2.0	≤2.0
PIM, 3rd Order, 2 x 20 W,	dBc	/	≤-153	≤-153
Input Power, maximum	watts	50		
Impedance	ohm	50		

Mechanical Specification

Connector Type		4.3-10 Female		
Size	mm	Φ298×152		
Antenna Weight	kg	0.9		
Mounting Kit		Ceiling, via hole (standard)		
Radome Material and Color		ABS, White, RAL9003		
Operational Temperature	oC	-55~60		
Operational Humidity	%	< 95		

Radiation Pattern

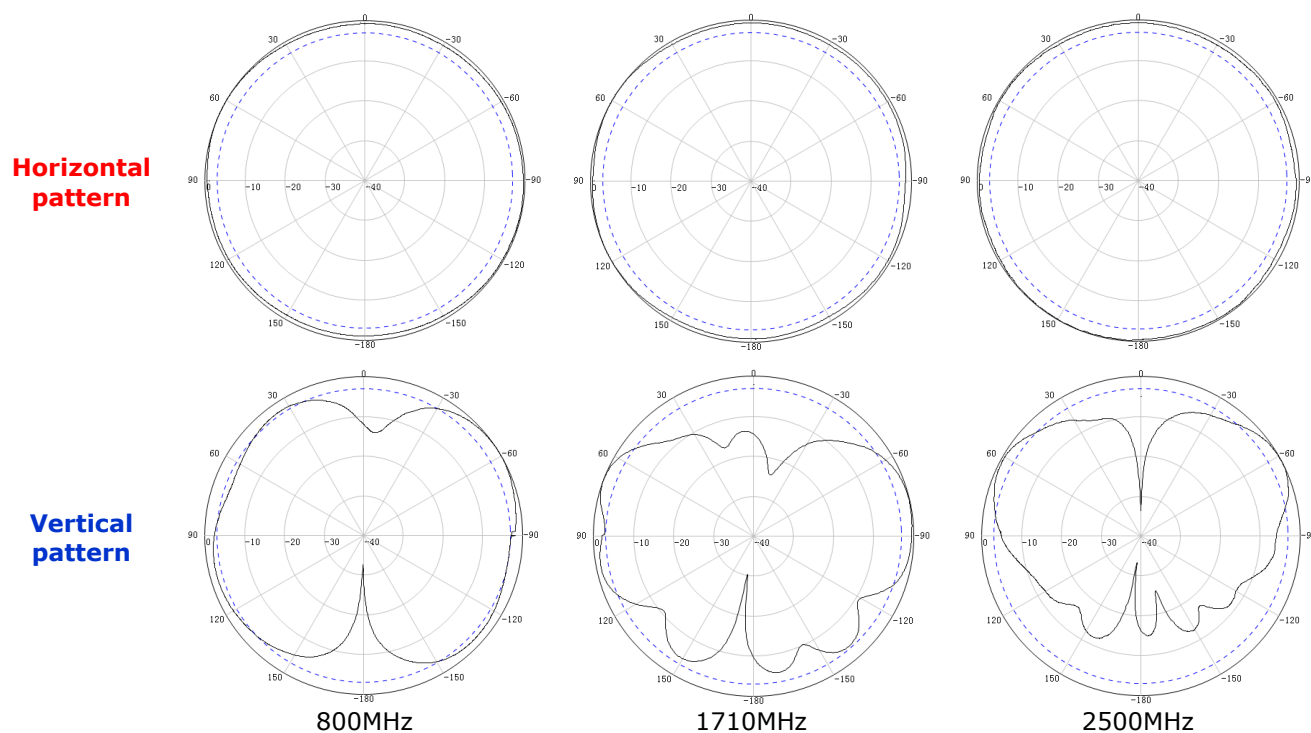

Features and Product Description

- Wideband Omni Antenna , coverage 380MHz - 6000MHz .
- Typically both used in indoor distribution of GSM/CDMA WIFI/3G/LTE/5G services.
- Low return loss,Stable performance.
- Compact, light-weight and easy to install.
- Supplied with mounting clamp.
- PIM<-153dBc @ 2x20 W.



Maahantuoja / Imported by: Orbis Oy, www.orbis.fi
Tuotekoodi / Product code: 3007038